

**Compatible - Kompatibilität**

Ind. Interchange	1/2
rtc	037
Cejn	550
Parker	17
Rectus	37
Foster	5205
AMFLO	C10
Hansen	520

Temperature Range - Temperaturbereich

Nitrile (N)	-20°C + 110°C (-4°F + 230°F)
FPM (V)	-20°C + 180°C (-4°F + 356°F)
EPDM (Ethylene Propylene)	-40°C + 150°C (-40°F + 302°F)

Working Pressure - Betriebsdruck

25 Bar (360 PSI)

Connction / Disconnection Max. Pressure -**Ein- und Auskoppelbar bis Max. Druck**

15 Bar (220 PSI)

Flow size - Nennweite

rtc type 460.11 11mm (1/2")

Standard version - Standardversion

Seals - Dichtung : Nitrile (N)

Material of Standard Coupler (steel)**Material für die Standardversion (Stahl)**

Body / Housing -	Steel tenifer threaded
Kupplungsgrundkörper/Gehäuse	Stahl Tneferiert
Inner Part / Cylinder -	Surface hardened steel
Innenteil / Zylinder	Zinc-nickel plated
Back Part - Hinterteil	Stahl gehärtet, Zink-Nickel beschichtet
Sleeve -	Steel zinc plated - Stahl verzinkt
Hülse	Steel zinc nickel plated & orange painted
Springs - Federn	Stahl Zink-Nickel beschichtet
Seals - Dichtungen	und orange lackiert
Plug -	Stainless steel - Edelstahl
Nippel	Nitrile (N)
	Surface hardened steel, galvanized
	Stahl gehärtet, verzinkt

Advantages

- The system perfectly fits to the ISO 4414, EN 983 safety requirements.
- Plug profile perfectly fits to the ISO 6150-C-17, AFNOR C-17 NF E 49-053, US MIL C-4109
- Through flow, minimum pressure loss.
- Negligible Connecting Force
- Smart and Ergonomic features
- Ease of Handling
- Optimised Size

Vorteil

- Sicherheit gemäß ISO 4414, EN 983
- Stecknippel gemäß ISO 6150-C-17, AFNOR C-17 NF E 49-053, US MIL C-4109
- Voller Durchgang, sehr geringer Druckverlust
- Einflache Bedienung, sehr geringe Kuppelkraft
- Kompakte Bauform

Brass Version (MS)

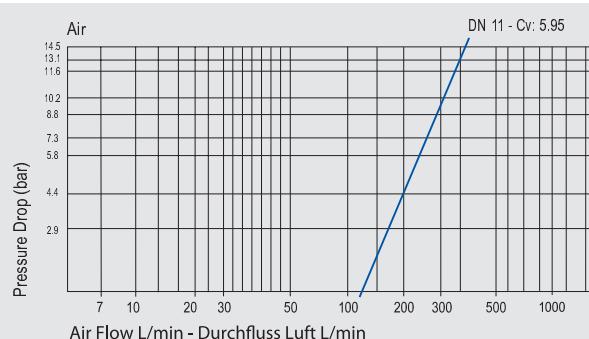
- Corrosion and ozone proof
- Suitable for internal and external applications

Messing Version (MS)

- Korrosion- und ozonbeständig
- Geeignet für Innen- und Außenanwendungen

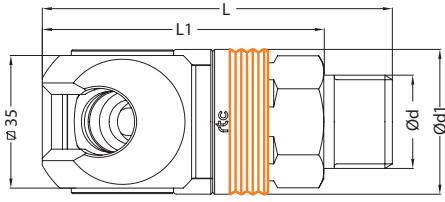
Material of Coupler (Brass - HB type)**Material für die Kupplung (Messing - HB Typ.)**

Body / Housing -	Brass nickel plated -
Kupplungsgrundkörper/Gehäuse	Messing vernickelt
Inner Part / Cylinder -	Aluminium
Innenteil / Zylinder	Aluminium
Back Part - Hinterteil	Brass nickel plated -
Sleeve - Hülse	Messing vernickelt
Springs - Federn	Brass nickel plated -
Seals - Dichtungen	Stainless steel -
Plug - Nippel	Edelstahl
	FPM (V)
	Stainless steel -
	Edelstahl

**Flow Rate vs Pressure Drop Graph**
460.11
rtc TYPE

rtc TYPE 460.11

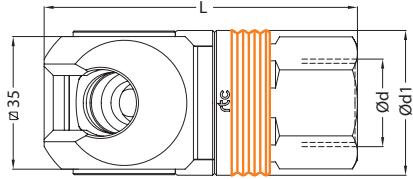
Male thread socket / Kupplung mit Aussengewinde

Socket / Kupplung	Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
	11	R205 00 106	460.11 SMO 17	BSP 3/8	38	81.5	70.5	30
	11	R205 00 107	460.11 SMO 21	BSP 1/2	38	82.5	70.5	30
	11	R205 00 108	460.11 SMO 26	BSP 3/4	38	85.5	70.5	30
	11	R205 00 112	460.11 STO 17	NPT 3/8	38	85.5	70.5	30
	11	R205 00 113	460.11 STO 21	NPT 1/2	38	88.5	70.5	30
	11	R205 00 114	460.11 STO 26	NPT 3/4	38	89.5	70.5	30
	11	-	460.11 SMO 17 MS	BSP 3/8	38	81.5	70.5	30
	11	R205 00 743	460.11 SMO 21 MS	BSP 1/2	38	82.5	70.5	30
	11	R205 00 744	460.11 SMO 26 MS	BSP 3/4	38	85.5	70.5	30
	11	-	460.11 STO 17 MS	NPT 3/8	38	85.5	70.5	30
	11	R205 00 745	460.11 STO 21 MS	NPT 1/2	38	88.5	70.5	30
	11	R205 00 746	460.11 STO 26 MS	NPT 3/4	38	89.5	70.5	30

*MS: Brass / Messing

rtc TYPE 460.11

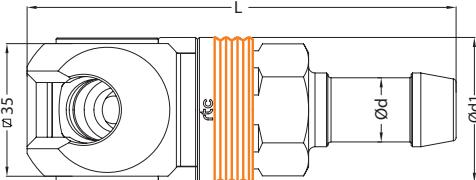
Female thread socket / Kupplung mit Innengewinde

Socket / Kupplung	Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
	11	R205 00 103	460.11 SFO 17	BSP 3/8	38	79	-	30
	11	R205 00 104	460.11 SFO 21	BSP 1/2	38	80.5	-	30
	11	R205 00 105	460.11 SFO 26	BSP 3/4	38	83.5	-	32
	11	R205 00 109	460.11 SNO 17	NPT 3/8	38	79	-	30
	11	R205 00 110	460.11 SNO 21	NPT 1/2	38	80.5	-	30
	11	R205 00 111	460.11 SNO 26	NPT 3/4	38	83.5	-	32
	11	-	460.11 SFO 17 MS	BSP 3/8	38	79	-	30
	11	R205 00 685	460.11 SFO 21 MS	BSP 1/2	38	80.5	-	30
	11	R205 00 684	460.11 SFO 26 MS	BSP 3/4	38	83.5	-	32
	11	-	460.11 SNO 17 MS	NPT 3/8	38	79	-	30
	11	R205 00 687	460.11 SNO 21 MS	NPT 1/2	38	80.5	-	30
	11	R205 00 686	460.11 SNO 26 MS	NPT 3/4	38	83.5	-	32

*MS: Brass / Messing

rtc TYPE 460.11

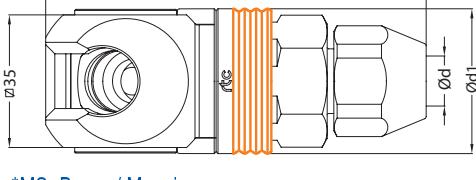
Socket with hose barb / Kupplung mit Schlauchanschluss

Socket / Kupplung	Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
	11	-	460.11 SHO 10	Ø10 - 3/8	38	96.5	-	-
	11	R205 00 712	460.11 SHO 13	Ø13 - 1/2	38	96.5	-	-
	11	-	460.11 SHO 16	Ø16 - 5/8	38	96.5	-	-
	11	-	460.11 SHO 10 MS	Ø10 - 3/8	38	96.5	-	-
	11	-	460.11 SHO 13 MS	Ø13 - 1/2	38	96.5	-	-
	11	-	460.11 SHO 16 MS	Ø16 - 5/8	38	96.5	-	-

*MS: Brass / Messing

rtc TYPE 460.11

Socket with plastic hose connection / Kupplung mit Kunststoffschlauchanschluss


Socket / Kupplung	Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
	11	-	460.11 SVO 0812	8x12	38	93	-	22
	11	-	460.11 SVO 1116	11x16	38	93	-	27
	11	-	460.11 SVO 0812 MS	8x12	38	93	-	22
	11	-	460.11 SVO 1116 MS	11x16	38	93	-	27

*MS: Brass / Messing



Plug with male thread / Nippel mit Aussengewinde

TYPE 460.11




Plug / Nippel	Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HE
	11	R255 00 074	460.11 PMF 17	BSP 3/8	-	56	45	19
	11	R255 00 075	460.11 PMF 21	BSP 1/2	-	59	45	24
	11	R255 00 290	460.11 PMF 26	BSP 3/4	-	60	45	27
	11	R255 00 277	460.11 PTF 17	NPT 3/8	-	57	45	19
	11	R255 00 278	460.11 PTF 21	NPT 1/2	-	62	45	24
	11	R255 00 291	460.11 PTF 26	NPT 3/4	-	64	45	27
	11	R355 00 250	460.11 PMF 17 SS	BSP 3/8	-	56	45	19
	11	R355 00 075	460.11 PMF 21 SS	BSP 1/2	-	59	45	24
	11	R355 00 327	460.11 PMF 26 SS	BSP 3/4	-	60	45	27
	11	-	460.11 PTF 17 SS	NPT 3/8	-	57	45	19
	11	R355 00 328	460.11 PTF 21 SS	NPT 1/2	-	62	45	24
	11	R355 00 253	460.11 PTF 26 SS	NPT 3/4	-	64	45	27



Plug with female thread / Nippel mit Innengewinde

TYPE 460.11




Plug / Nippel	Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HE
	11	R255 00 076	460.11 PFF 17	BSP 3/8	-	59	-	19
	11	R255 00 077	460.11 PFF 21	BSP 1/2	-	61	-	24
	11	R255 00 078	460.11 PFF 26	BSP 3/4	-	63	-	32
	11	R255 00 279	460.11 PNF 17	NPT 3/8	-	59	-	19
	11	R255 00 280	460.11 PNF 21	NPT 1/2	-	61	-	24
	11	R255 00 292	460.11 PNF 26	NPT 3/4	-	63	-	32
	11	R355 00 076	460.11 PFF 17 SS	BSP 3/8	-	59	-	19
	11	R355 00 077	460.11 PFF 21 SS	BSP 1/2	-	61	-	24
	11	R355 00 078	460.11 PFF 26 SS	BSP 3/4	-	63	-	32
	11	-	460.11 PNF 17 SS	NPT 3/8	-	59	-	19
	11	R355 00 255	460.11 PNF 21 SS	NPT 1/2	-	61	-	24
	11	R355 00 256	460.11 PNF 26 SS	NPT 3/4	-	63	-	32



Plug with hose barb / Nippel mit Schlauchanschluss

TYPE 460.11




Plug / Nippel	Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HE
	11	R255 00 079	460.11 PHF 10	Ø10 - 3/8	18	62	-	-
	11	R255 00 080	460.11 PHF 13	Ø13 - 1/2	20	68	-	-
	11	R255 00 081	460.11 PHF 16	Ø16 - 5/8	22	79	-	-
	11	R355 00 079	460.11 PHF 10 SS	Ø10 - 3/8	18	62	-	-
	11	R355 00 080	460.11 PHF 13 SS	Ø13 - 1/2	20	68	-	-
	11	R355 00 081	460.11 PHF 16 SS	Ø16 - 5/8	22	79	-	-



Plug with plastic hose connection / Nippel mit Kunststoffschlussenschlauchanschluss

TYPE 460.11



Plug / Nippel	Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HE
	11	-	460.11 PVF 0812	8x12	-	65	-	22
	11	-	460.11 PVF 1116	11x16	-	70	-	27

*SS: Stainless Steel / Edelstahl