

rtc[®]

QUICK CONNECT TECHNOLOGY
www.rtc-tec.com



464.08

rtc TYPE





Compatible - Kompatibilität

rtc	013
Nitto Kohki	20 & 30 & 40
Cejn	315
Rectus	13

Temperature Range - Temperaturbereich

Nitrile (N)	-20°C + 110°C (-4°F + 230°F)
FPM (V)	-20°C + 180°C (-4°F + 356°F)
EPDM (Ethylene Propylene)	-40°C + 150°C (-40°F + 302°F)

Working Pressure - Betriebsdruck

25 Bar (360 PSI)

Connction / Disconnection Max. Pressure -

Ein und Auskuppelbar bis Max. Druck

15 Bar (220 PSI)

Flow size - Nennweite

rtc type 464.08 8mm (3/8")

Standard version - Standardversion

Seals - Dichtung : Nitrile (N)

Material of Standard Coupler /

Material für die Standardversion

Body / Housing - Kupplungsgrundkörper/Gehäuse	Steel tenifer threaded Stahl teneferiert
Inner Part / Cylinder - Innenteil / Zylinder	Surface hardened steel Zinc-nickel plated Stahl gehärtet, Zink-Nickel beschichtet
Back Part - Hinterteil Sleeve - Hülse	Steel zinc plated - Stahl verzinkt Zinc diecasted, nickel plated & orange plastic coated Zink-Druckguss, vernickelt und orange Gummi beschichtet
Springs - Federn Seals - Dichtungen	Stainless steel - Edelstahl Nitrile (N)
Plug - Nippel	Surface Hardened Steel, Galvanized Stahl gehärtet, verzinkt

Advantages

- The system perfectly fits to the **ISO 4414, EN 983** safety requirements.
- Through flow, minimum pressure loss.
- Negligible Connecting Force
- Smart and Ergonomic features
- Ease of Handling
- Optimised Size

Vorteil

- Sicherheit gemäß **ISO 4414, EN 983**
- Voller Durchgang, sehr geringer Druckverlust
- Einfache Bedienung, sehr geringe Kuppelkraft
- Kompakte Bauform

Aluminium Version (AL)

- Light weight 75g

Aluminum Version (AL)

- Geringes Gewicht 75g


Material of Aluminium Coupler (DL type) /

Material für die Aluminium Version (DL Typ.)

Body / Housing - Kupplungsgrundkörper/Gehäuse	Aluminium Aluminum
Inner Part / Cylinder - Innenteil / Zylinder	Surface hardened steel Zinc-nickel plated Stahl gehärtet, Zink-Nickel Beschichtet
Back Part - Hinterteil Sleeve - Hülse	Aluminium - Aluminum Zinc diecasted, nickel plated & orange plastic coated Zink-Druckguss, vernickelt & orange Gummi beschichtet
Springs - Federn Seals - Dichtungen	Stainless steel - Edelstahl FPM (V)
Plug - Nippel	Surface Hardened Steel, Galvanized Stahl gehärtet, verzinkt



Flow Rate vs Pressure Drop Graph

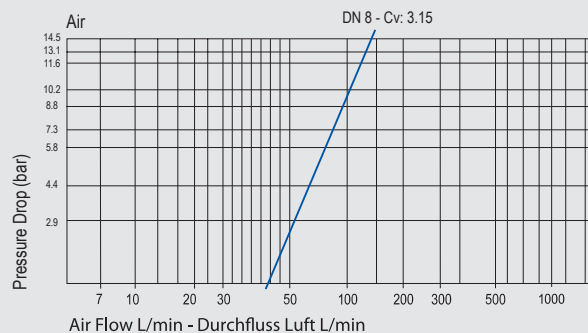


464.08
rtc TYPE

rtc TYPE 464.08

Male thread socket / Kupplung mit Aussengewinde

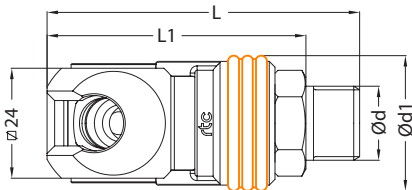


Socket / Kupplung	Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
	8	R205 00 053	464.08 SMO 13	BSP 1/4	30	69.5	58.5	20
	8	R205 00 021	464.08 SMO 17	BSP 3/8	30	69.5	58.5	20
	8	R205 00 022	464.08 SMO 21	BSP 1/2	30	71.5	59.5	22
	8	R205 00 426	464.08 STO 13	NPT 1/4	30	70.5	56.5	20
	8	R205 00 037	464.08 STO 17	NPT 3/8	30	71.5	57.5	20
	8	R205 00 038	464.08 STO 21	NPT 1/2	30	78.5	59.5	22
	8	R205 00 063	464.08 SMO 13 AL	BSP 3/8	30	69.5	58.5	20
	8	R205 00 064	464.08 SMO 17 AL	BSP 1/2	30	69.5	58.5	20
	8	R205 00 065	464.08 SMO 21 AL	BSP 3/4	30	71.5	59.5	22
	8	R205 00 427	464.08 STO 13 AL	NPT 3/8	30	70.5	56.5	20
	8	R205 00 075	464.08 STO 17 AL	NPT 1/2	30	71.5	57.5	20
	8	R205 00 076	464.08 STO 21 AL	NPT 3/4	30	78.5	59.5	22

*AL: Aluminium

rtc TYPE 464.08

Female thread socket / Kupplung mit Innengewinde

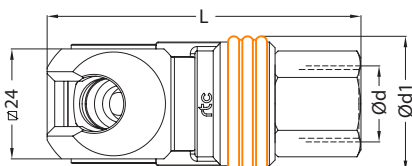


Socket / Kupplung	Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
	8	R205 00 018	464.08 SFO 13	BSP 1/4	30	68.5	-	20
	8	R205 00 019	464.08 SFO 17	BSP 3/8	30	68.5	-	20
	8	R205 00 020	464.08 SFO 21	BSP 1/2	30	69.5	-	24
	8	R205 00 034	464.08 SNO 13	NPT 1/4	30	68.5	-	20
	8	R205 00 035	464.08 SNO 17	NPT 3/8	30	68.5	-	20
	8	R205 00 036	464.08 SNO 21	NPT 1/2	30	69.5	-	24
	8	R205 00 060	464.08 SFO 13 AL	BSP 3/8	30	68.5	-	20
	8	R205 00 061	464.08 SFO 17 AL	BSP 1/2	30	68.5	-	20
	8	R205 00 062	464.08 SFO 21 AL	BSP 3/4	30	69.5	-	24
	8	R205 00 072	464.08 SNO 13 AL	NPT 3/8	30	68.5	-	20
	8	R205 00 073	464.08 SNO 17 AL	NPT 1/2	30	68.5	-	20
	8	R205 00 074	464.08 SNO 21 AL	NPT 3/4	30	69.5	-	24

*AL: Aluminium

rtc TYPE 464.08

Socket with hose barb / Kupplung mit Schlauchanschluss

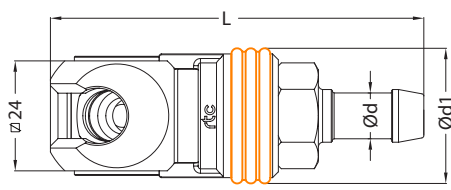


Socket / Kupplung	Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
	8	R205 00 054	464.08 SHO 08	Ø8 - 5/16	30	79	-	-
	8	R205 00 055	464.08 SHO 10	Ø10 - 3/8	30	79	-	-
	8	R205 00 056	464.08 SHO 13	Ø13 - 1/2	30	79	-	-
	8	R205 00 077	464.08 SHO 08 AL	Ø8 - 5/16	30	79	-	-
	8	R205 00 078	464.08 SHO 10 AL	Ø10 - 3/8	30	79	-	-
	8	R205 00 079	464.08 SHO 13 AL	Ø13 - 1/2	30	79	-	-

*AL: Aluminium

rtc TYPE 464.08

Socket with plastic hose connection / Kupplung mit Kunststoffschlauchanschluss

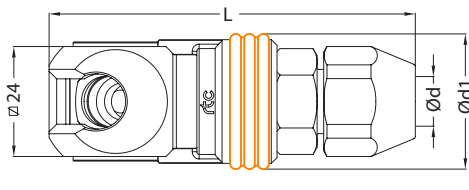


Socket / Kupplung	Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
	8	R205 00 057	464.08 SVO 0610	6.5x10	30	80	-	22
	8	R205 00 058	464.08 SVO 0812	8.0x12	30	80	-	22
	8	R205 00 059	464.08 SVO 1116	11x16	30	84	-	27
	8	R205 00 080	464.08 SVO 0610 AL	6.5x10	30	80	-	22
	8	R205 00 081	464.08 SVO 0812 AL	8x12	30	80	-	22
	8	R205 00 082	464.08 SVO 1116 AL	11x16	30	84	-	27

*AL: Aluminium


Plug with male thread / Nippel mit Aussengewinde

TYPE 464.08 **rtc**

Plug / Nippel	Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
	8	R255 00 032	464.08 PMF 13	BSP 1/4	-	41	30	14
	8	R255 00 033	464.08 PMF 17	BSP 3/8	-	43	32	19
	8	R255 00 034	464.08 PMF 21	BSP 1/2	-	47	33	24
	8	R255 00 058	464.08 PTF 13	NPT 1/4	-	42	30	14
	8	R255 00 059	464.08 PTF 17	NPT 3/8	-	44	32	19
	8	R255 00 060	464.08 PTF 21	NPT 1/2	-	50	33	22

Plug with female thread / Nippel mit Innengewinde

TYPE 464.08 **rtc**

Plug / Nippel	Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
	8	R255 00 035	464.08 PFF 13	BSP 1/4	-	43	-	17
	8	R255 00 036	464.08 PFF 17	BSP 3/8	-	44	-	19
	8	R255 00 037	464.08 PFF 21	BSP 1/2	-	48.5	-	27
	8	R255 00 061	464.08 PNF 13	NPT 1/4	-	43	-	17
	8	R255 00 062	464.08 PNF 17	NPT 3/8	-	44	-	22
	8	R255 00 063	464.08 PNF 21	NPT 1/2	-	49	-	27


Plug with hose barb / Nippel mit Schlauchanschluss

TYPE 464.08 **rtc**

Plug / Nippel	Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
	8	R255 00 038	464.08 PHF 08	Ø8 - 5/16	14	51	-	-
	8	R255 00 039	464.08 PHF 10	Ø10 - 3/8	14	51	-	-
	8	R255 00 040	464.08 PHF 13	Ø13 - 1/2	16	51	-	-

Plug with plastic hose connection / Nippel mit Kunststoffschlauchanschluss

TYPE 464.08 **rtc**

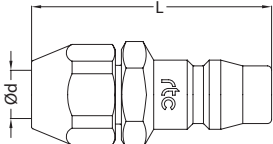Plug / Nippel	Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
	8	-	464.08 PVF 0610	6.5x10	-	52	-	22
	8	-	464.08 PVF 0812	8x12	-	52	-	22
	8	-	464.08 PVF 1116	11x16	-	56	-	27

rtc TYPE HPC

Coupling head protective cover - Schutzhauben für Schwenkkupplungen



Suitable for series Geeignet für Serien	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	∅
462.06 / 460.06 / 461.06 / 465.08 / 466.06 / 467.06	R295 00 385	HPC 0620	20
463.08 / 464.08 / 460.08 / 461.08	R295 00 340	HPC 0825	25
460.11 / 461.11	R295 00 531	HPC 1130	30



Material: Polyamide
Werkstoff: Polyamid

rtc TYPE BPC

Coupling body protective cover - Schutzhülsen für Schwenkkupplungen



Suitable for series Geeignet für Serien	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	∅
462.06 / 460.06 / 461.06 / 465.08 / 466.06 / 467.06	R295 00 480	BPC 0620	20
463.08 / 464.08 / 460.08 / 461.08	R295 00 481	BPC 0825	25
460.11 / 461.11	R295 00 482	BPC 1130	30



Material: Vinyl
Werkstoff: Vinyl

rtc TYPE HGS

Plastic hose protective spiral guard - Knickschutz für Spiralschlauch



Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	∅d
-	HGS 0610	6.5x10
R295 00 337	HGS 0812	8x12
R295 00 401	HGS 1116	11x16



Material: Polyamide
Werkstoff: Polyamid



rtc[®]

QUICK CONNECT TECHNOLOGY

www.rtc-tec.com



RTC TEC Bağlantı Elemanları A.Ş.

İTOSB, 9. Cadde No. 8
34539 Tepeören / Tuzla / İstanbul
TURKEY

Tel: +90 216 593 47 82

Fax: +90 216 593 47 85

info@rtc-tec.com

www.rtc-tec.com



RTC Couplings GmbH

Jahnstrasse 86
73037 Göppingen
GERMANY

Tel: +49 7161 98796-50

Fax: +49 7161 98796-79

mail@rtc-couplings.com

www.rtc-couplings.com



RTC Couplings North America

60 Meg Drive.
London, On. N6E 3T6
CANADA

Tel: +1 519 204 8334

Fax: +1 519 518 6047

tony@rtc-northamerica.com

www.rtc-northamerica.com